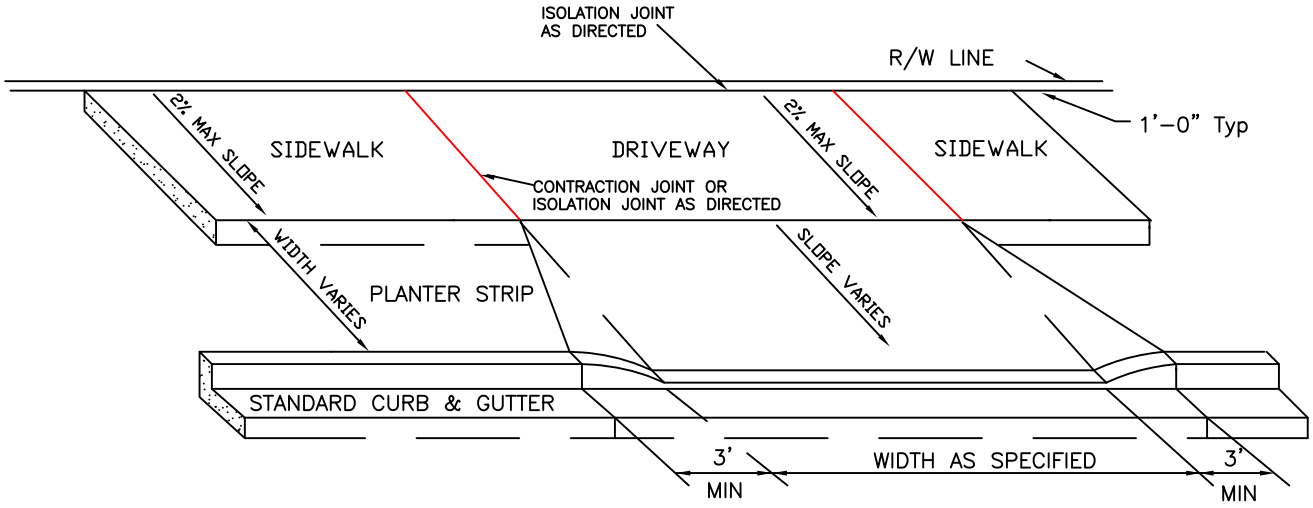

DRIVEWAY / ALLEY APPROACH FOR SIDEWALK WITH PLANTER STRIP

NOTES:

1) ALL DRIVEWAYS AND SIDEWALK SECTIONS THROUGH DRIVEWAYS SHALL HAVE A NOMINAL THICKNESS OF SIX INCHES OF CONCRETE. ALL COMMERCIAL DRIVEAYS SHALL INCLUDE REBAR OR HAVE THICKNESS INCREASED TO 8".

2) WING SECTIONS BETWEEN FULL CURB HEIGHT AND DRIVEWAY SHALL BE THREE FEET MINIMUM. USE LONGER TRANSITIONS FOR COMMERCIAL APPROACHES.

3) CONCRETE SHALL HAVE A 28 DAY ULTIMATE COMPRESSIVE STRENGTH OF – 3300 PSI MINIMUM.

4) DEPENDING ON THE WIDTH OF THE DRIVEWAY OR ALLEY APPROACH, CONSTRUCT ONE OR MORE CONTRACTION JOINTS.

City of McMinnville

DETAIL FOR
DRIVEWAY WITH PLANTER STRIP

DATE: March 2015

DRAWING NO. 3