

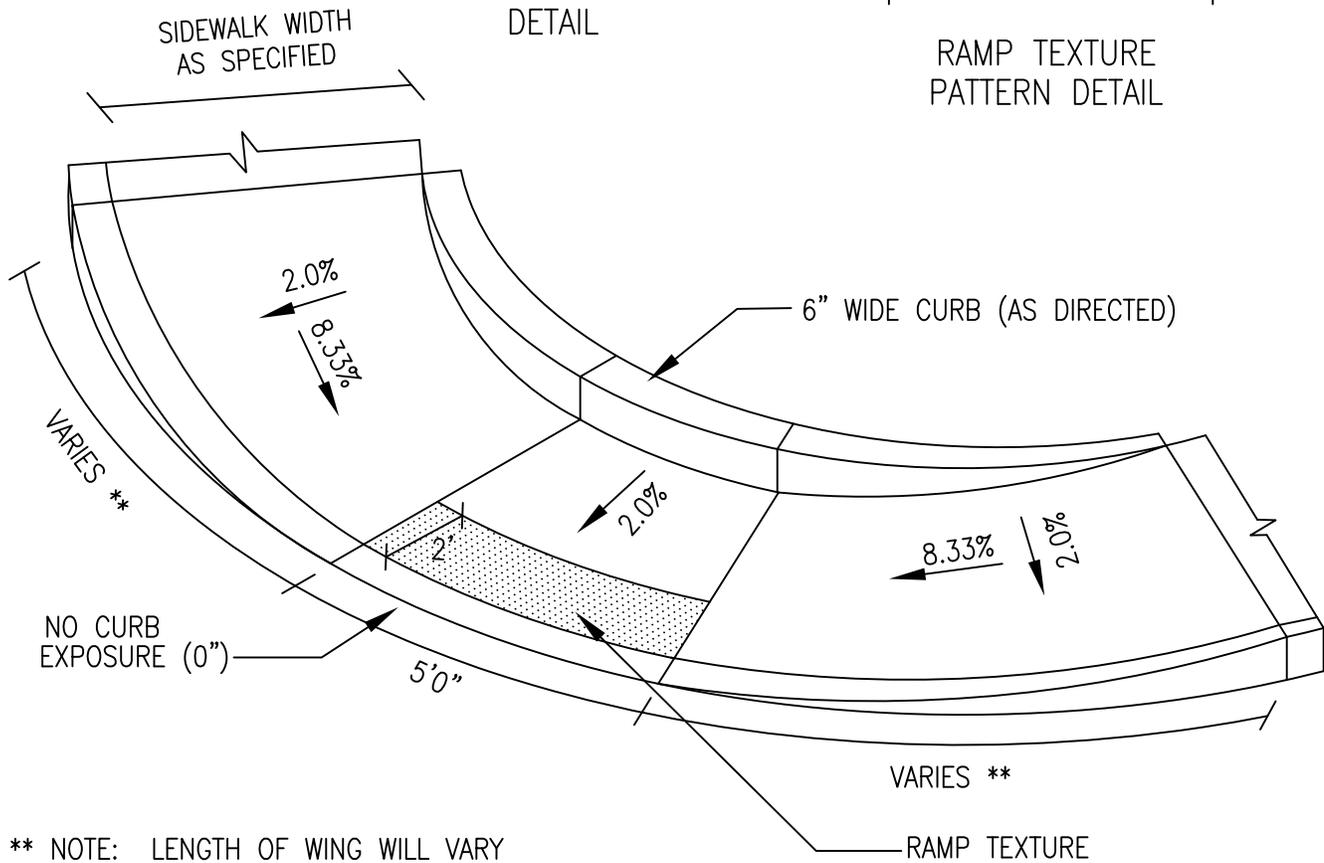
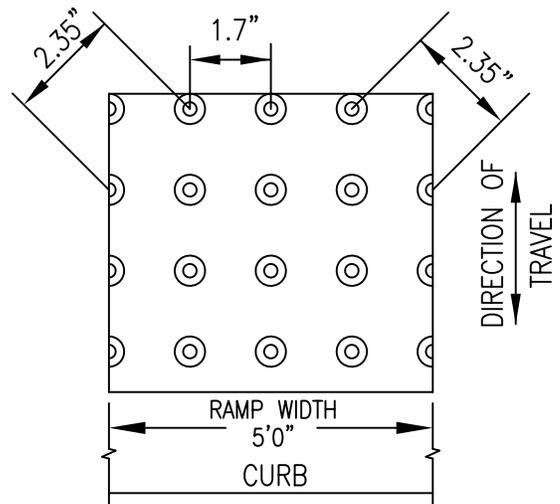


PLACE TRUNCATED DOME DETECTABLE WARNING TEXTURE IN THE LOWER 24" OF THE THROAT OF THE RAMP ONLY. ARRANGE DOMES USING IN-LINE PATTERN ONLY AS SHOWN IN DETAIL. COLOR OF TEXTURE TO BE SAFETY YELLOW. FOR CONSTRUCTION OF SIDEWALK RAMPS OUTSIDE OF PUBLIC RIGHT-OF-WAY, CHECK WITH BUILDING CODES.

NOTE: RAMP THICKNESS TO BE 6" UNLESS OTHERWISE APPROVED

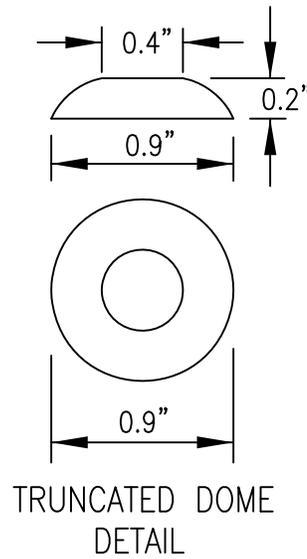

\*\* NOTE: LENGTH OF WING WILL VARY BASED ON ADJACENT STREET GRADE  
MAX LENGTH OF WING = 15'

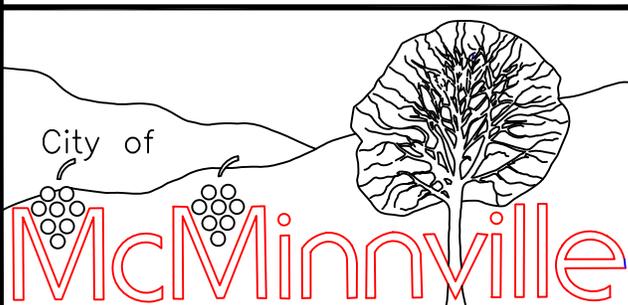

CORNER ACCESS RAMP  
CURBSIDE SIDEWALK

DATE: AUGUST 2009

DRAWING NO. 1A