


PARALLEL CURB RAMP



NOTES:

1. ACCESS RAMPS SHALL COMPLY WITH JULY 2011 "PROWAG" GUIDELINES. EXCEPTIONS TO THIS DRAWING MUST BE APPROVED BY THE ENGINEER AND MUST COMPLY WITH PROWAG.
2. RAMP LAYOUT AND LOCATION SHALL BE APPROVED BY THE CITY PRIOR TO CONSTRUCTION.
3. NO ABOVE GROUND UTILITIES ARE PERMITTED WITHIN RAMP OR LANDING AREA.
4. INSTALL TRANSITION PANELS AS DIRECTED WHEN EXISTING ADJACENT SIDEWALK EXCEEDS 2% CROSS SLOPE.
5. DETECTABLE WARNING MATS WITH TRUNCATED DOMES SHALL BE CAST IN PLACE AND EXTEND THE FULL WIDTH OF THE LANDING. COLOR SHALL BE SAFTEY YELLOW.
6. CONCRETE STRENGTH SHALL BE 3300 PSI.

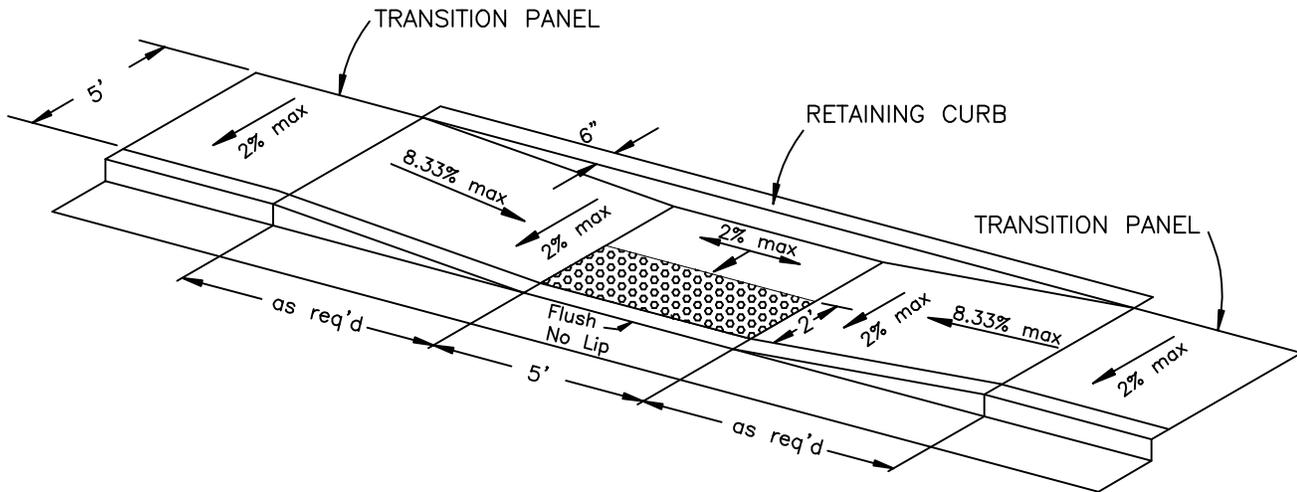

DETAIL FOR
PARALLEL CURBSIDE
SIDEWALK RAMP

DATE:
APRIL 2014

DRAWING NO.
2A