


DRIVEWAY / ALLEY APPROACH FOR SIDEWALK WITH PLANTER STRIP

NOTES:

- 1) ALL DRIVEWAYS AND SIDEWALK SECTIONS THROUGH DRIVEWAYS SHALL HAVE A NOMINAL THICKNESS OF SIX INCHES OF CONCRETE. ALL COMMERCIAL DRIVEWAYS SHALL INCLUDE REBAR OR HAVE THICKNESS INCREASED TO 8".
- 2) WING SECTIONS BETWEEN FULL CURB HEIGHT AND DRIVEWAY SHALL BE THREE FEET MINIMUM. USE LONGER TRANSITIONS FOR COMMERCIAL APPROACHES.
- 3) CONCRETE SHALL HAVE A 28 DAY ULTIMATE COMPRESSIVE STRENGTH OF - 3300 PSI MINIMUM.
- 4) DEPENDING ON THE WIDTH OF THE DRIVEWAY OR ALLEY APPROACH, CONSTRUCT ONE OR MORE CONTRACTION JOINTS.

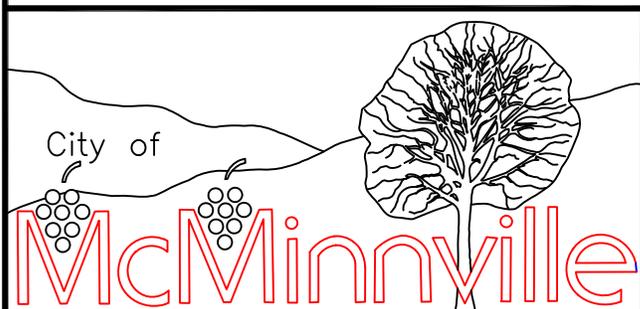

DETAIL FOR
DRIVEWAY WITH PLANTER STRIP

DATE: March 2015

DRAWING NO. 3