

PLACE "C" MIX AC MINIMUM THICKNESS OF 4" (2-2" LIFTS) OR THE THICKNESS OF THE REMOVED PAVEMENT, WHICHEVER IS GREATER. COMPACT AS SPECIFIED.

PLACE "C" MIX AC MINIMUM THICKNESS OF 4" (2-2" LIFTS)


SEAL SURFACE OVER JOINT WITH TACK MATERIAL. (AC PATCH ONLY)

EXIST. PAVEMENT

6"  
MIN.

6"  
MIN.

EXIST. PAVEMENT

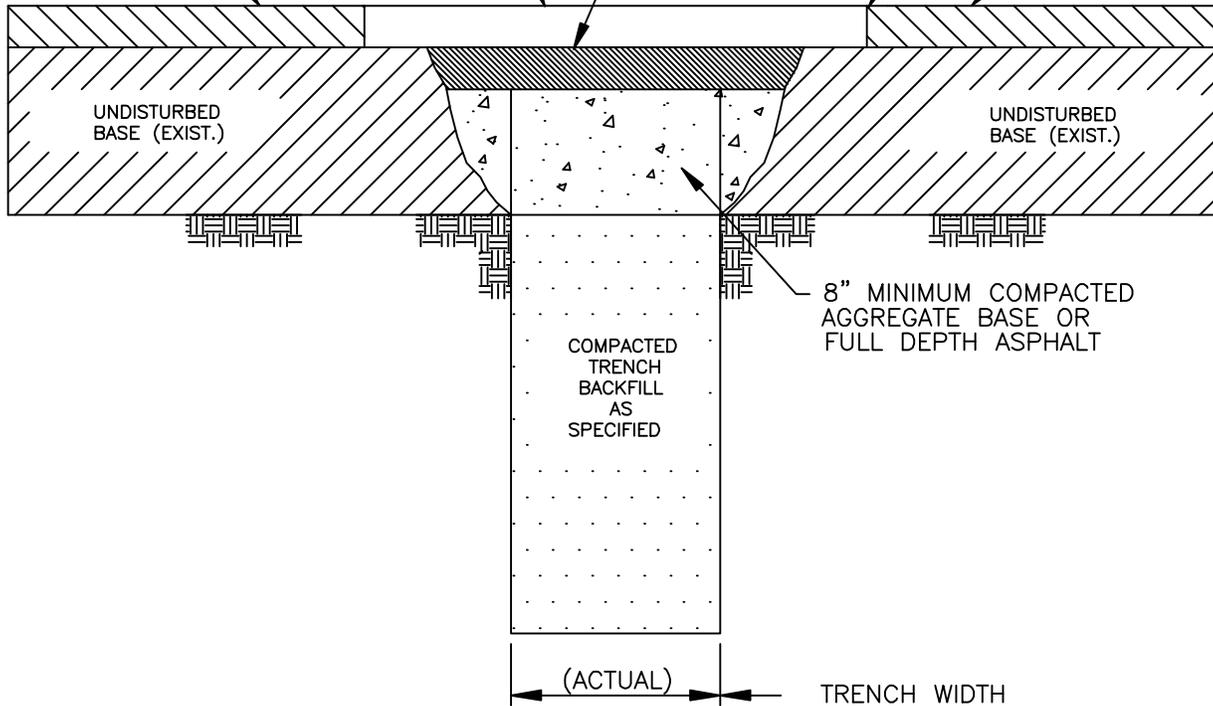

NOTES:

- 1) ALL EXISTING AC OR PCC PAVEMENT SHALL BE SAWCUT 12" FROM EDGE OF TRENCH PRIOR TO PAVING.
- 2) CONCRETE PAVEMENT SHALL BE REPLACED WITH CONCRETE TO A MINIMUM THICKNESS OF 6" OR TO THE THICKNESS OF REMOVED PAVEMENT, WHICHEVER IS GREATER.
- 3) USE HOT CLASS "C" A.C. MIX WHEN POSSIBLE. COLD A.C. MIX SHALL BE REPLACED WITH HOT A.C.



DETAIL FOR  
STREET CUT

DATE: AUGUST 2009

DRAWING NO. 8